


2011 MINI CATALOG

CHOKE COILS



Same Day Shipping • Engineering Kits • Value-Added Services • Complete Line of SMT Components

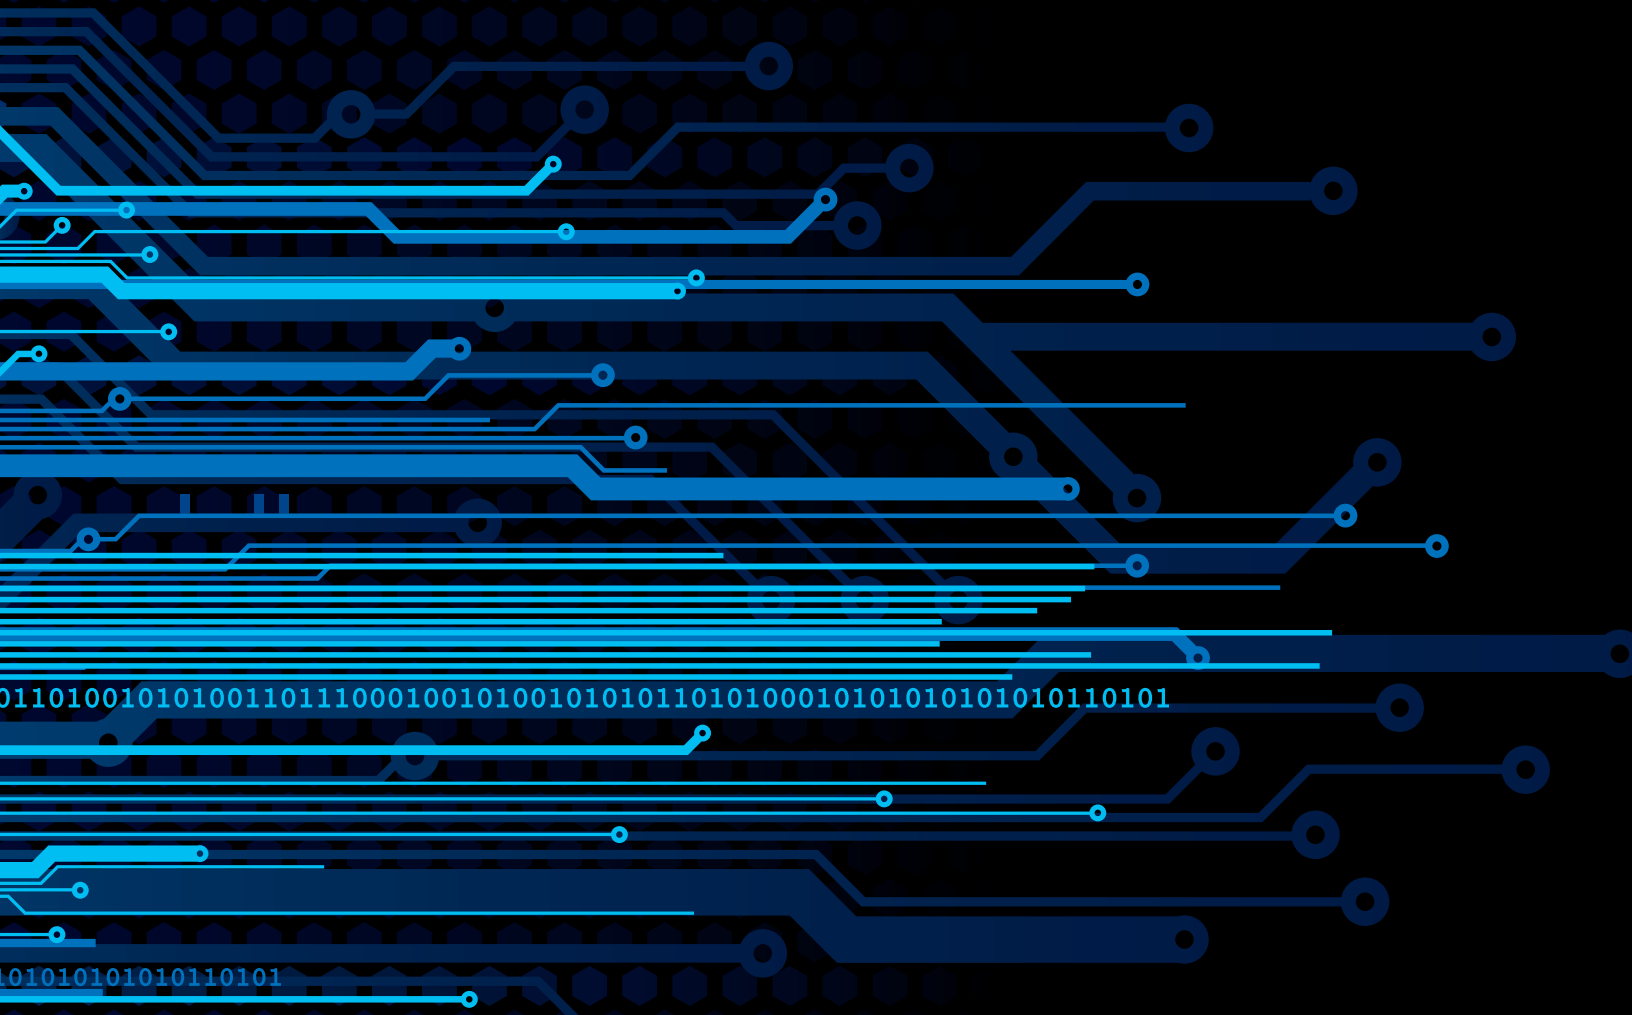

VENKEL LTD.



www.venkel.com
(800) 950-8365

Common Mode Choke Coils


CMCC Series

This series is used in all applications where a wire wound common mode choke is required in a chip type form.

- Application**
- The CMCC Series are widely used in notebook, PC, USB, and HUB applications. The wire wound features provide advanced low DC resistance and higher current tolerance, while giving very stable performance characteristics.

- Features**
- Operating temperature -40°C to $+85^{\circ}\text{C}$
 - Excellent solderability and resistance to soldering heat
 - Suitable for flow and reflow soldering
 - High reliability and standard EIA size for easy placement
 - Direct cross to Murata Global P/N DLW31 and DLW21 Series or previous Series PLW3216, and PLW2012

Material Structure

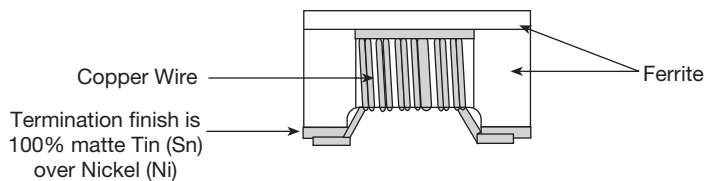

Unit: inch (mm)

Size	L	W	t
0805	0.079 (2.00)	0.047 (1.20)	0.047 (1.20)
1206	0.126 (3.20)	0.063 (1.60)	0.075 (1.90)

How To Order


CMCC	1206	900	N	T
Common Mode Choke Coil3.	Chip Size	Typical Impedance at 100MHz 900 = 90Ω 261 = 260Ω 102 = 1000Ω	Tolerance N = $\pm 30\%$	Tape and Reel 2,000 pcs./reel

Standard termination finish for this product is 100% matte Tin (Sn)

All components in this section are RoHS compliant per the EU directives and definitions.

Standard Termination is 100% matte Tin (Sn)
Pb: For 90% Tin (Sn)/10% Lead (PB) Termination add Pb above.


CMCC 0805 (2012) Standard Series

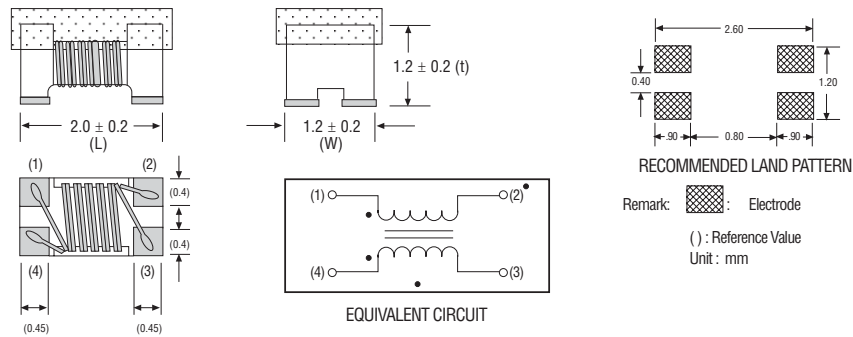

SPECIFICATION

Part Number	Impedance ¹ at 100 MHz (Ω)	Rated Voltage V (DC)	Withstanding Voltage V (DC)	Rated ² Current max (mA)	DC Resistance max (Ω)	Insulation Resistance min (M Ω)
CMCC0805670NT	67	50	125	400	0.25	10
CMCC0805900NT	90	50	125	330	0.35	10
CMCC0805121NT	120	50	125	370	0.30	10
CMCC0805181NT	180	50	125	330	0.35	10
CMCC0805261NT	260	50	125	300	0.40	10
CMCC0805371NT	370	50	125	280	0.45	10

CMCC 1206 (3216) Standard Series

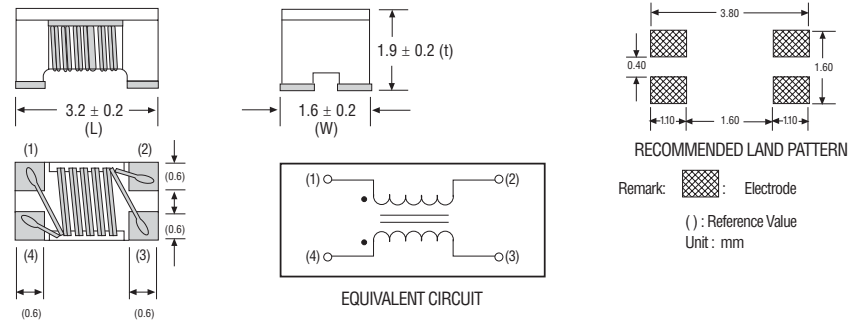

SPECIFICATION

Part Number	Impedance ¹ at 100 MHz (Ω)	Rated Voltage V (DC)	Withstanding Voltage V (DC)	Rated ² Current max (mA)	DC Resistance max (Ω)	Insulation Resistance min (M Ω)
CMCC1206900NT	90	50	125	370	0.3	10
CMCC1206161NT	160	50	125	340	0.4	10
CMCC1206261NT	260	50	125	310	0.5	10
CMCC1206601NT	600	50	125	260	0.8	10
CMCC1206102NT	1000	50	125	230	1.0	10
CMCC1206222NT	2200	50	125	200	1.2	10

1. Impedance is measured on a HP4287A
2. For 15°C rise.

Same Day Shipping ▪ Engineering Kits ▪ Value-Added Services ▪ Complete Line of SMT Components

Full line of SMT passive components

Ceramic Chip Capacitors

C Series

High Voltage Ceramic Chip Capacitors

HVC Series

Low Inductance Chip Capacitors

LIC Series

High-Q NPO Chip Capacitors

HQN Series

Tantalum Chip Capacitors

TCM Series, TCR Series

Chip Resistors

CR Series

Low Value Chip ResistorsL

CR Series

Ultra Low Value Chip Resistors

ULCR Series

Thick Film Chip Resistors -

Anti-Sulfuration

CRS Series

Rectangular Thin Film Chip Resistors

TFCR Series

Ultra Precision Thin Film Chip Resistors

UPTF Series

High Value Chip Resistors

HMCR Series

Precision High Value Chip Resistors

PHCR Series

Chip Resistor Arrays

CRN Series

Trimmable Chip Resistors

TRCR Series

NTC Chip Thermistors

NTC Series

Surface Mount Resistor Networks

THR Series

Multilayer Chip Inductors

MLF Series

Low Value Multilayer Chip Inductors

LMCI Series

Wire Wound Chip Inductors

NL Series

Miniature RF Chip Inductors

MRFI Series

Common Mode Choke Coils

CMCC Series

Ferrite Beads

FBS/FBM/FBC Series

Surface Mount Engineering Kits



VENKEL LTD.

VENKEL LTD.
5900 SHEPHERD MOUNTAIN COVE
AUSTIN, TX 78730
www.venkel.com
sales@venkel.com



© 2011 VENKEL LTD. 20110318